




ASCOM Carbonate and Chemicals Manufacturing

ASCOM 50

Description & Applications

ASCOM 50 is a high whiteness product derived from pure and bright limestone. It is milled and classified to 8 - 9 microns. **ASCOM 50** is used for water based decorative paints, solvent based decorative paints, protective coatings, rubber moldings, adhesives and sealants.

Physical Characteristics		Chemical Analysis	
Brightness	96.50 ±1%	CaCO ₃	99.5
Refractive index	1.59%	CaO	55.67
Oil absorption (ISO 787/5)	20.50 ±0.5 g/10 g	MgO	0.1
DOP absorption (ISO 787/5)	33.50 ±0.5 g/100g	Fe ₂ O ₃	0.01
pH value (ISO 787/9)	9 Max.	Al ₂ O ₃	0.02
Bulk density	0.55 ±0.05 g/cm ³	SiO ₂	0.3
Hardness in Mohs*	3	L.O.I	43.64
Moisture	0.2% Max.		

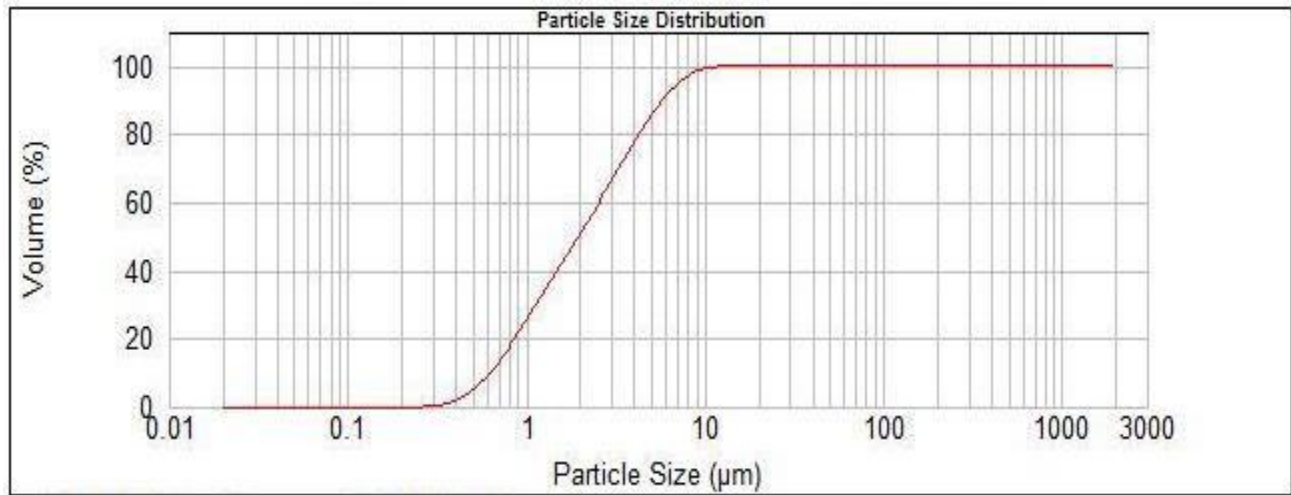

*Measured with Malvern on untreated material

- D97: 8.00 – 9.00 microns
- D50: 2.00 – 2.20 microns
- 47 – 52 % finer than 2 microns

The data in the Technical Data Sheet represents average values which are valid and reliable but not legally binding. ASCOM will not be liable for any use of data, or any damages arising from the use of products for purposes not examined in detail. This Technical Data Sheet renders all previous versions invalid. (August 012)

ASCOM Carbonate & Chemicals Manufacturing

S.A.E Under Private Free Zone Region

A Head Office : 22, Street 265, New Maadi - Cairo, Egypt

T (+202) 25164209 - 25175649

F (+202) 2520337

Factory : First Cell - Third Sector - Industrial Zone

Al-Matahrah - East of the Nile - El-Menya, Egypt